

## UT20H **Recirculating Pot Washer**



The UT20H machine is specially designed to accommodate pots, pans, baking trays, mixing bowls, bun pans, tote boxes, standard Australian baking trays, garbage bins, and kitchen utensils. Top and bottom revolving wash and rinse arms provide a powerful and thorough wash action, and the new water jet designs with knife-like action, blast and strip heavy baked on dirt from all soiled surfaces. No damage to utensils thanks to wash jet balancing, reducing the need for hold-down devices. The front operation design provides easy access to the inside of the machine and for loading and unloading. The UT20H conforms to the highest of health and sanitary standards, meeting FSANZ safe food codes and certifications in HACCP and WaterMark.

## **UT20H standard features** and benefits

- · Chamber opening up to 800mm clear
- Durable stainless steel wash and rinse arms
- Independent wash and rinse systems with high volume pumps for powerful wash action
- Accepts baking trays and 75 Litre garbage bins
- Accurate digital temperature displays
- 2, 4 & 6 minutes wash cycle times
- Machine starts upon a push of a button
- Wash & rinse pump fitted a standard
- Operation interlocked to rinse temperature
- Pass-Through model available



















Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice



v1 2024





## **UT20H** Recirculating Pot Washer




A. Drain connection 2" BSP Gravity B. Hot Water Connection 1/2" BSP

C. Electrical connection 3 phase 415V + N

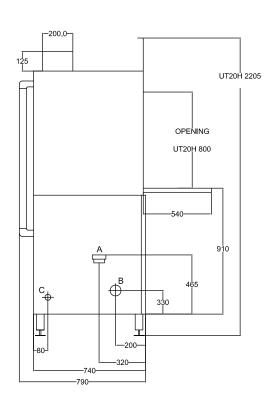

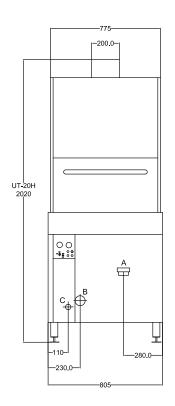

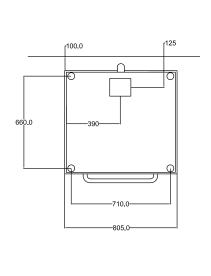





## **UT20H SPECIFICATIONS**

DIMENSIONS (WxDxH)	805 x 805 x 2025 mm
HEIGHT WITH DOOR OPEN	2185 mm
WASH CHAMBER (WxDxH)	665 x 630 x 800 mm
RACK SIZE & OPENING (WxDxH)	660 x 610 x 540 mm
ELECTRICAL CONNECTION	3 Phase - 415V + V
RATING	13.5 kW
WATER CONNECTION	60°C / 2-4 bar (28-56 psi)

DRAIN CONNECTION	2" BSP Gravity
WASH CYCLE	2, 4 and 6 mins
WASH AND RINSE PUMP	Fitted
WATER CONSUMPTION	5L Cycle
TANK CAPACITY	70L
WEIGHT	170 kg
PACKED	1.3m <sup>3</sup>

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.

