

TSSU-48-12D-2-HC



Dimensions	
External Width (mm)	1229
External Depth (mm)	766
External Height (mm)	1093
Gross Volume (Litres)	340
Supplied Shelves	2
Internal Net Height (mm)	535
Top Pans Supplied (depth mm)	12x 1/6 GN (100)
Per Drawer Capacity (max depth mm)	1x 305 mm x 458 mm pan (150)
Unpackaged Weight (kg)	121
Packaged Weight (kg)	132
Packaged Dimensions (W x D x H mm)	1302 x 833 x 1270
Cutting Board (L x D mm)	1229 x 299

Build	
Drawer Count	2
Cord Length (Meters)	3.35

Technical	
Temperature Range	0.5 : 5°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	2.3
Watts	529
Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



UK & Ireland
EMEA
Australia

[0800 783 2049](tel:08007832049)
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TSSU-48-12D-2-HC

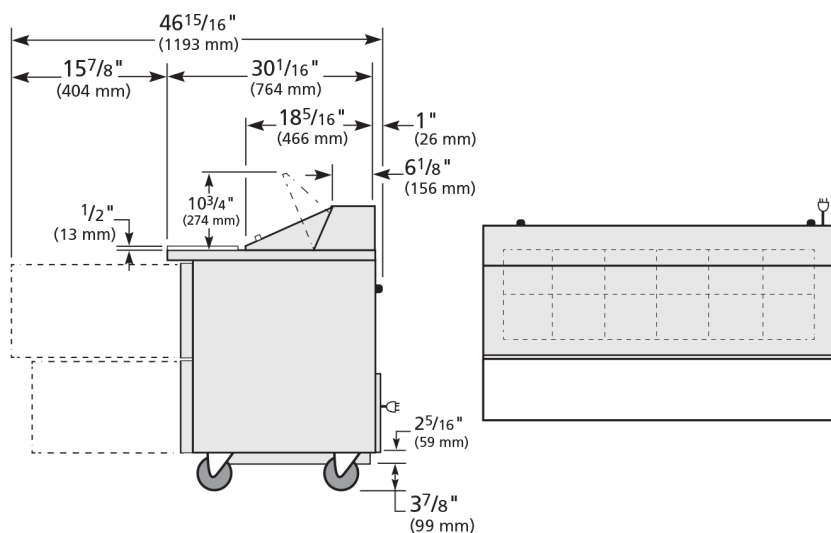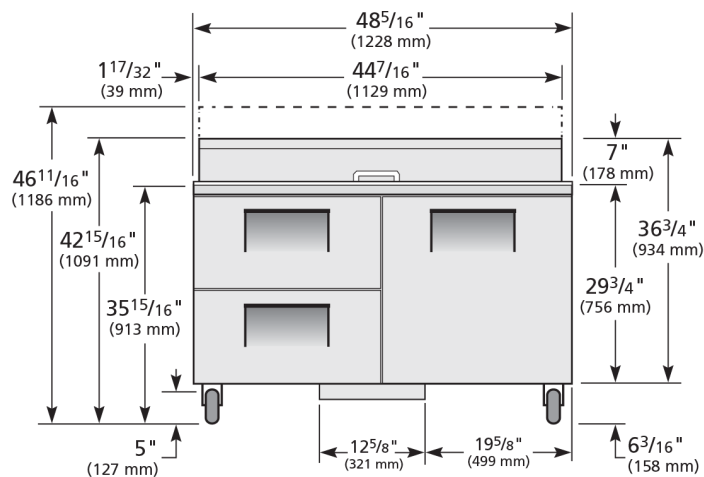

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

