Upright Cabinets

# T-49-HC

Upright Foodservice Refrigerator, 2 Full Solid Swing Doors



| Dimensions | |
|---|---|
| External Width (mm) | 1375 |
| External Depth (mm) | 750 |
| External Height (mm) | 2074 |
| Exclusions | Depth does not include 13 mm for rear access panel. |
| Net Volume (Litres) | 914 |
| Gross Volume (Litres) | 1388 |
| Supplied Shelves | 8 |
| Shelf Size (L x D mm) | 624 x 569 |
| Internal Net Height (mm) | 1300 |
| Unpackaged Weight (kg) | 166 |
| Packaged Weight (kg) | 177 |
| Packaged Dimensions (W x D x H mm) | 1486 x 902 2134 |
| Supplied with | Heavy duty lock-in-place ø 64 mm castors (83 mm height) |

| Build | |
|---|---|
| Door Description | 2 Full Solid Swing Doors |
| Exterior Construction | Stainless steel front, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base |
| Air Intake Position | Front |
| Ventilation Position | Rear |
| Clearance Required | 26 mm rear, zero sides |
| Cord Length (Meters) | 2.74 |
| Internal Lighting | LED |
| Standard w/ Locks | Standard |

| Technical | |
|---|---|
| Temperature Range | 0.5 : 3.3°C |
| Refrigerant | R290 |
| Voltage/Frequency/Phase | 220-240V/50-60Hz/1 |
| Amps | 2.2 |
| Watts | 506 |
| Climate Class | 5 |
| Operating Statement | Regular Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard | EN 16825 |
| EEC | C |
| Energy Efficiency Index | 49.8 |
| Defrost Type | Auto |
| Energy Consumption (kWh/24h) | 2.79 |
| Energy Consumption (kWh/Annum) | 1019 |

5 YEARS WARRANTY

natural refrigerant.

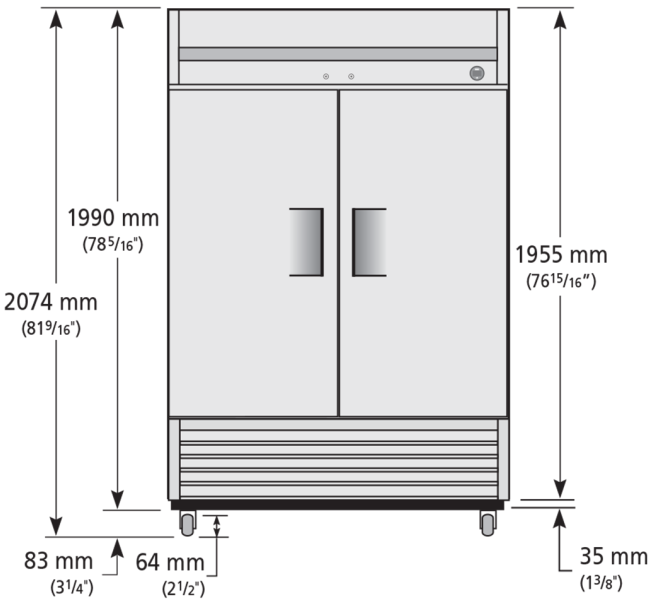
Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

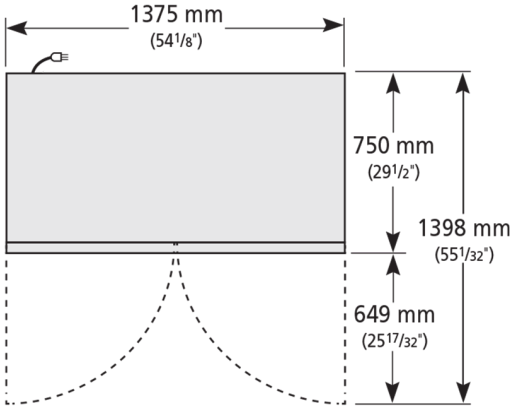

**UK & Ireland** 0800 783 2049 TFIUK@truemfg.com
**EMEA** +41 61 563 07 05 TrueCHCustomerService@truemfg.com
**Australia** +61 2 9619 9999 TrueRefAus@truemfg.com

Upright Cabinets

# T-49-HC

Upright Foodservice Refrigerator, 2 Full Solid Swing Doors




Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


| | | |
|---|---|---|
| **UK & Ireland** | 0800 783 2049 | TFIUK@truemfg.com |
| **EMEA** | +41 61 563 07 05 | TrueCHCustomerService@truemfg.com |
| **Australia** | +61 2 9619 9999 | TrueRefAus@truemfg.com |