

Main Features

- The control panel is positioned at the front of the machine and is provided with controls designed for ease of use
- The shafts rotate on ball bearings suitable for use under high-stress conditions
- The bowl protection guard complies with safety regulations. When lifted up, it activates a microswitch that automatically stops the machine.
- The unit rests on four rubber vibration mounts that guarantee stability and the reduction of noise levels.

Standard accessories include :

- - Thin Wire Whisk
- - Flat Beater
- - Kneading Hook



SPECIFICATIONS

Voltage	400Vac 3 50Hz
Power	3.9 kw
Speed	Speeds - 3 speeds - 1° 36 RPM (1.2kw) 2° 73 (2.5kw), 3° 146 (3.1kw)
Maximum Current	8.2A
Weight	380 kg
Plug Supplied	No
Bowl Lift	Manual
Bowl Capacity	80 liters
Bowl Diameter	480mm x 490mm
Humidity	Max 95%
Noise level	<70 decibel
Ambient Temp	Max 40°C
Warranty	2 Years Parts and Labour

OPTIONAL CONTROL -
Variable Speed Inverter - Single Phase Operation


STANDARD CONTROL -
3 speeds with 3 phase Motor.




DIMENSIONS

External Width	850mm
External Depth	1120 mm
External Height	1680mm


FRONT

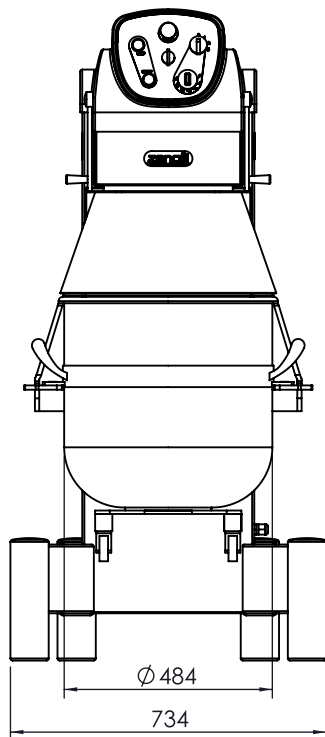


SIDE

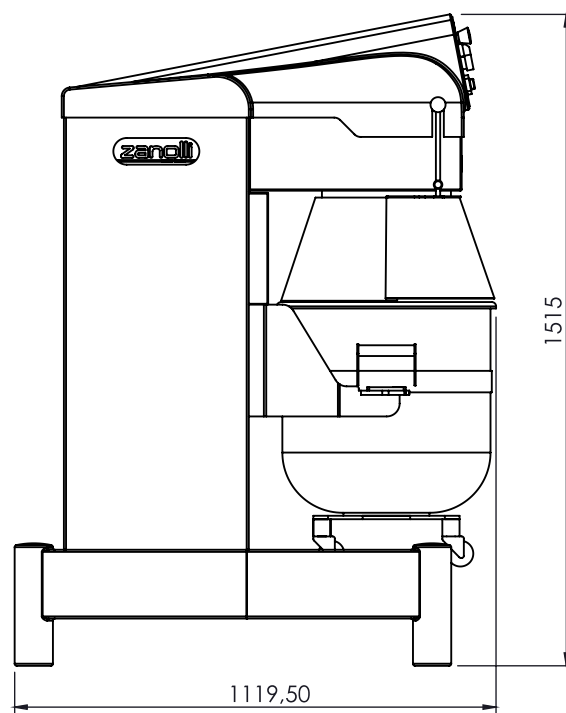

TOP

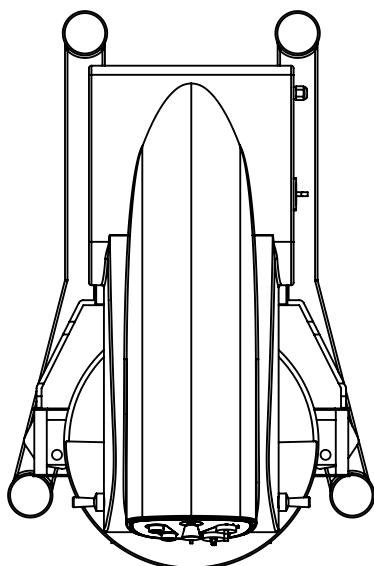

SIDE

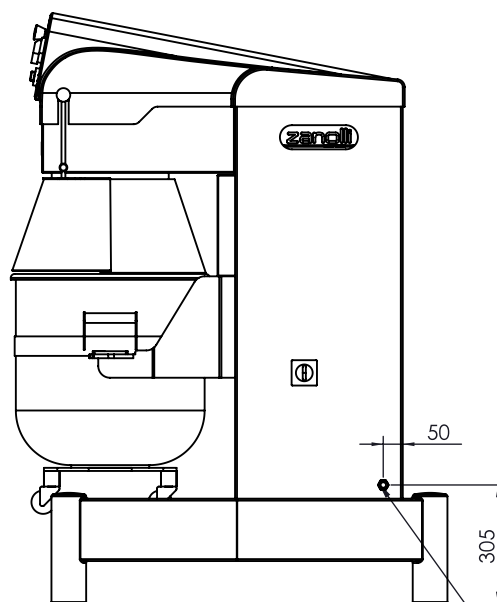

We reserve the right to alter specifications without notice.

power supply entry



THE
GOOD
LADY

Phone: 1800 183 818 Email: support@thegoodlady.com.au
Website: www.thegoodlady.com.au

PRODUCTIVITY CHART - Selene Mixers

Use of the tools				 					
Product									
Speed	MAX			MEDIUM	MINIMUM	MINIMUM		MAX MINIMUM	
PL 80	11 lt	32 lt	24 lt	40 kg	32 kg	28 kg	23 kg	19 kg	48 kg

TOOL GUIDE - Selene Mixers

Standard equipment						
PL 80	●	●	●		●	○

ACCESSORIES

Stainless Steel Bowl

Thin Wire Wisk

Flat Beater

Steel kneading Spiral

Thick Wire Wisk

Trolley for Bowl

Reduction Kit Bowl + Accessories Selene 80 to 40

Reduction Kit Bowl + Accessories Selene 80 to 60



THE
GOOD
LADY

Phone: 1800 183 818 Email: support@thegoodlady.com.au
Website: www.thegoodlady.com.au