


Product Information

- This unit is designed to be mounted under a custom made stainless steel bench (manufactured & fitted by others) and comes complete with bainie marie and hotcupboard
- Wet or dry operation (temperature varies greatly when run dry, should not be left unattended for long periods of time)
- Temperature regulation via digital control, designed to hold product between 65°C - 90°C.
- Independent controls for bainie marie, hot cupboard
- Air insulated, double skinned tank for energy efficient heating
- Hot cupboard equipped with a fan forced heating system
- Top mounted easy glide doors that do not sit in a bottom track, eliminates dirt trap. 1/1GN shelf configuration (1 shelf per door)
- Robust 304 grade stainless steel construction
- Manual fill and manual empty, valve operated waste
- 1/1 GN sized well, fits pans up to 150mm deep (sold separately). Pan dividers not supplied
- Customer supplied tops and gantry's, contact Stoddart representative for clarification on electrical requirements
- **12-month parts and labour warranty**



Specifications


Model	CH.BMH.U.7
W x D x H (mm)	2460 x 750 x 900
Well Opening W x D (mm)	2358 x 512
Total Connected Load	8.85kW
Electrical Connection	3Ø+N+E 400VAC / 50Hz (Onsite connection)
Water Connection	G 1/2" BSP
Waste Connection	1 1/4" BSP

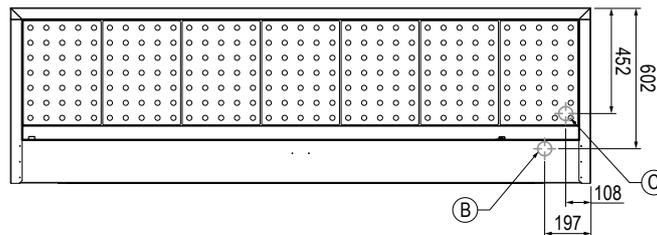

Optional Extras

Radius Well	
Add R to code after the U	CH.BMH.UR.7
Left Hand Controls	
Add .L after the U or UR in the product code to specify left hand controls	CH.BMH.U.L.7 CH.BMH.UR.L.7

Note: Optional extras must be selected at time of order

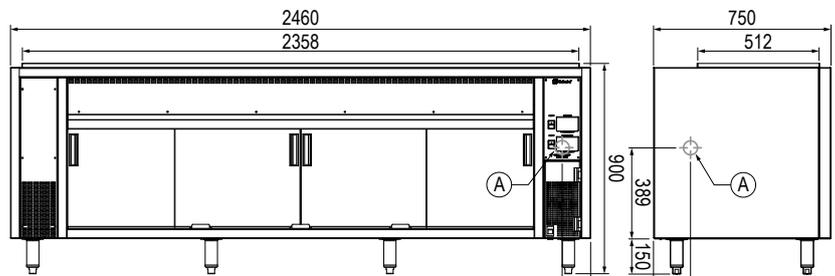

Accessories

Large Pan Dividers (To suit large GN pans)	CA.PXL
Cross Pan Dividers (To suit smaller GN pans)	CA.PXS

Legend

- A** Electrical Connection
- B** Water Connection
- C** Waste Connection

