

## Main Features

- The control panel is positioned at the front of the machine and is provided with controls designed for ease of use
- The shafts rotate on ball bearings suitable for use under high-stress conditions
- The bowl protection guard complies with safety regulations. When lifted up, it activates a microswitch that automatically stops the machine.
- The unit rests on four rubber vibration mounts that guarantee stability and the reduction of noise levels.

Standard accessories include :

- Thin Wire Whisk
- Flat Beater
- Kneading Hook



## SPECIFICATIONS

Voltage	400Vac 3 50Hz
Power	3.9 kw
Speed	Speeds - 3 speeds - 1° 36 RPM (1.2kw) 2° 73 (2.5kw), 3° 146 (3.1kw)
Maximum Current	8.2A
Weight	380 kg
Plug Supplied	No
Bowl Lift	Manual
Bowl Capacity	80 liters
Bowl Diameter	480mm x 490mm
Humidity	Max 95%
Noise level	<70 decibel
Ambient Temp	Max 40°C
Warranty	2 Years Parts and Labour

### OPTIONAL CONTROL - Variable Speed Inverter - Single Phase Operation




### STANDARD CONTROL - 3 speeds with 3 phase Motor.




## DIMENTIONS

External Width	850mm
External Depth	1120 mm
External Height	1680mm


## FRONT

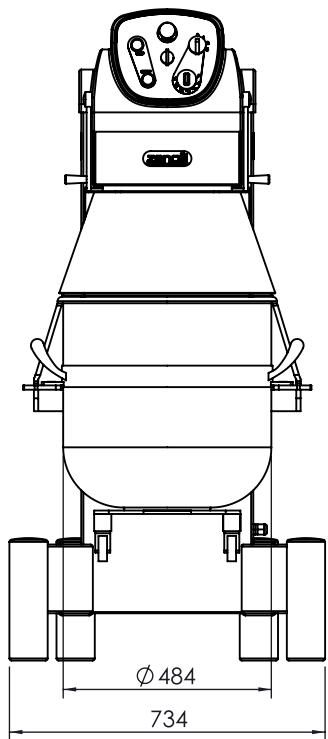


## SIDE

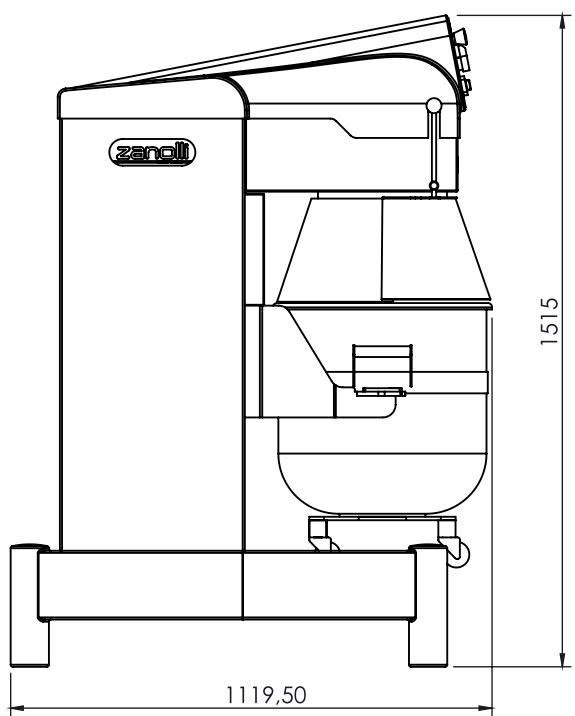

## TOP

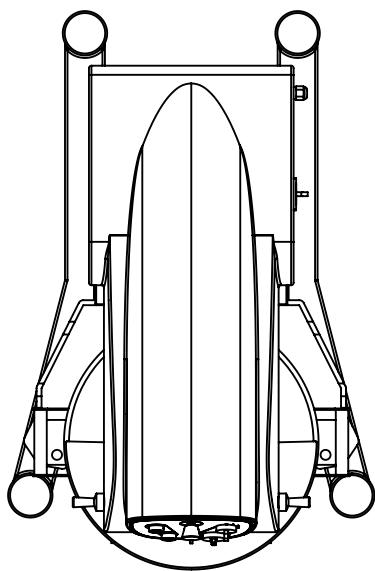

## SIDE

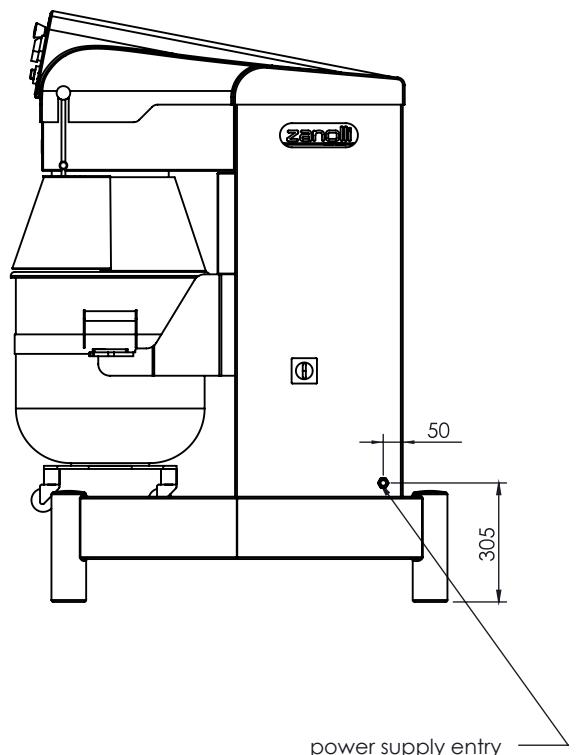

We reserve the right to alter specifications without notice.

# SELENE 80 AUTO

## PLANETARY MIXERS

COMIDA

## PRODUCTIVITY CHART - Selene Mixers

Use of the tools									
Product	Eggs/cheese	Whipped cream	Mayonnaise	Wheat/potato	Biscuits for cakes/cookies	Dough for bread	Dough for pizza	Dough/cakes	
Speed	MAX	MEDIUM	MINIMUM	MINIMUM	MAX	MINIMUM	MAX	MINIMUM	
PL 80	11 lt	32 lt	24 lt	40 kg	32 kg	28 kg	23 kg	19 kg	48 kg

## TOOL GUIDE - Selene Mixers

Standard equipment						
PL 80	●	●	●		●	○

## ACCESSORIES

Stainless Steel Bowl

Thin Wire Wisk

Flat Beater

Steel kneading Spiral

Thick Wire Wisk

Trolley for Bowl

Reduction Kit Bowl + Accessories Selene 80 to 40

Reduction Kit Bowl + Accessories Selene 80 to 60



Phone: 1800 183 818 Email: support@thegoodlady.com.au  
Website: www.thegoodlady.com.au