

Main Features

- The control panel is positioned at the front of the machine and is provided with controls designed for ease of use
- The shafts rotate on ball bearings suitable for use under high-stress conditions
- The bowl protection guard complies with safety regulations. When lifted up, it activates a microswitch that automatically stops the machine.
- The unit rests on four rubber vibration mounts that guarantee stability and the reduction of noise levels.

Standard accessories include :

- Thin Wire Whisk
- Flat Beater
- Kneading Hook

SPECIFICATIONS

Voltage	400Vac 3 50Hz
Power	1.5kw
Speed	3 speeds - 1° 34 RPM (0.59kw) 2° 68 (1.1kw), 3° 136 (1.5kw)
Maximum Current	4.3A
Weight	210 kg
Plug Supplied	No
Bowl Lift	Manual
Bowl Capacity	40 liters
Bowl Diameter	410mm x 390mm
Humidity	Max 95%
Noise level	<70 decibel
Ambient Temp	Max 40°C
Warranty	2 Years Parts and Labour



OPTIONAL CONTROL - Variable Speed Inverter - Single Phase Operation




STANDARD CONTROL - 3 speeds with 3 phase Motor.




DIMENTIONS

External Width	690mm
External Depth	930mm
External Height	1480mm


FRONT

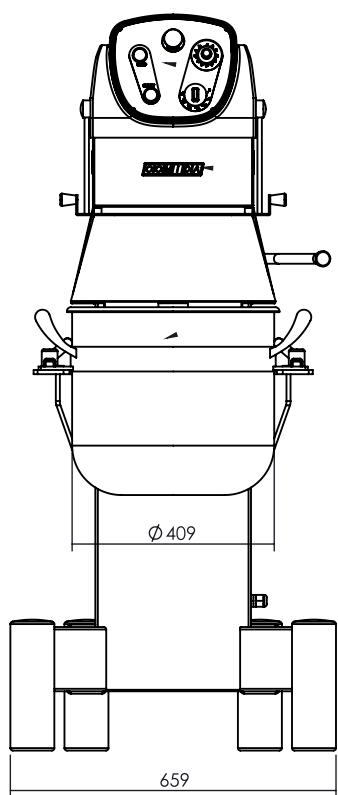


SIDE

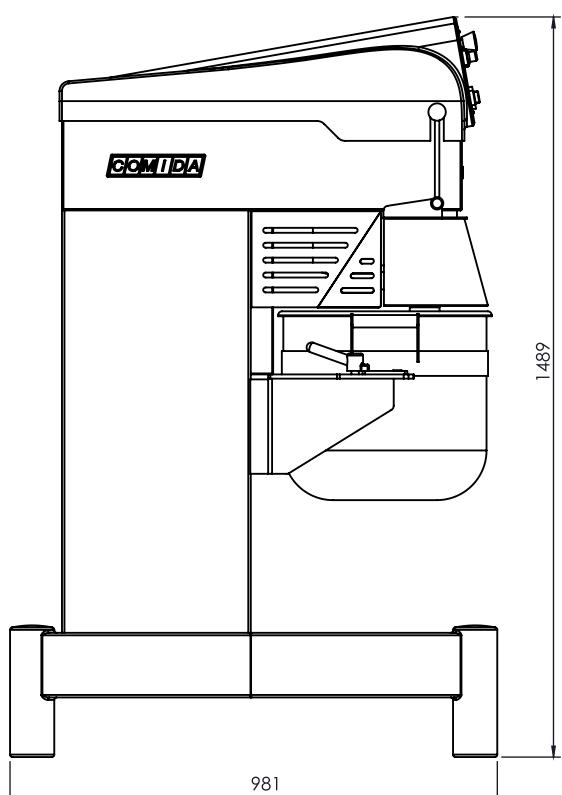

TOP

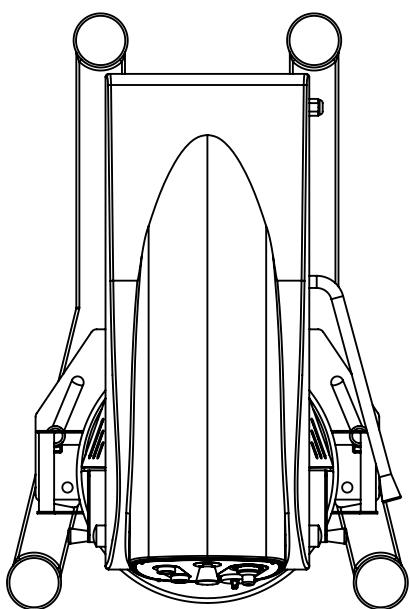

SIDE

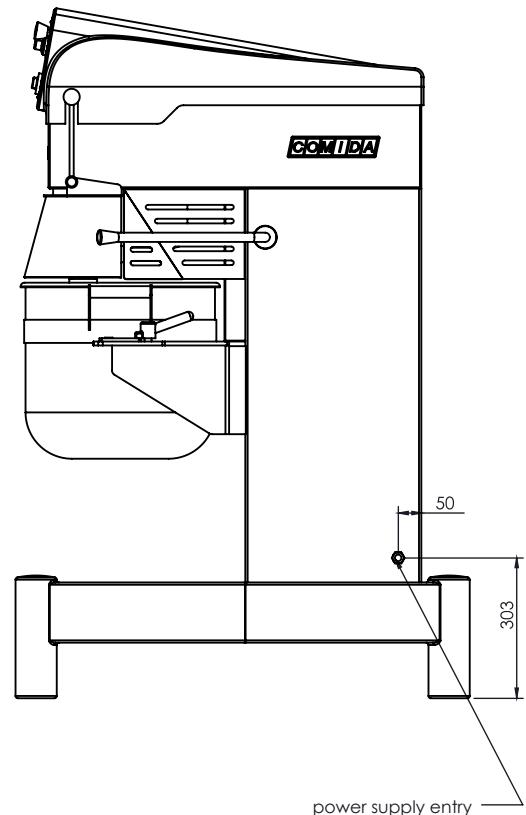

We reserve the right to alter specifications without notice.

PRODUCTIVITY CHART - Selene Mixers



TOOL GUIDE - Selene Mixers



ACCESSORIES

Stainless Steel Bowl

Thin Wire Whisk

Flat Beater

Kneading Hook

Steel kneading Spiral

Thick Wire Whisk

Scraper

Trolley for Bowl

Automatic Lifting System

Reduction Kit Bowl + Accessories Selene 40 to 20