

# TUC-93-HC

 Deep Undercounter Refrigerator, 3 Solid Swing Doors



| Dimensions                         |                                                                                                          |
|------------------------------------|----------------------------------------------------------------------------------------------------------|
| External Width (mm)                | 2373                                                                                                     |
| External Depth (mm)                | 818                                                                                                      |
| External Height (mm)               | 839                                                                                                      |
| Exclusions                         | Depth does not include 26 mm for rear bumpers.                                                           |
| Net Volume (Litres)                | 760                                                                                                      |
| Gross Volume (Litres)              | 875                                                                                                      |
| Supplied Shelves                   | 6                                                                                                        |
| Shelf Size (L x D mm)              | Left & Right: 600 x 712.<br>Central: 648 x 712                                                           |
| Internal Net Height (mm)           | 550                                                                                                      |
| Unpackaged Weight (kg)             | 237                                                                                                      |
| Packaged Weight (kg)               | 248                                                                                                      |
| Packaged Dimensions (W x D x H mm) | 2540 x 966 x 1245                                                                                        |
| Supplied with                      | Heavy duty lock-in-place ø 64 mm castors (83 mm height) (reduced height option available, totals 810 mm) |

| Build                 |                                                            |
|-----------------------|------------------------------------------------------------|
| Door Description      | 3 Solid Swing Doors                                        |
| Exterior Construction | Stainless steel front & countertop, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base               |
| Air Intake Position   | Front                                                      |
| Ventilation Position  | Front                                                      |
| Clearance Required    | Zero back and sides                                        |
| Cord Length (Meters)  | 2.13                                                       |
| Standard w/ Locks     | Not Standard (SPEC3 option)                                |

| Technical                      |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                        |
| Refrigerant                    | R290                                                                               |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1                                                                 |
| Amps                           | 1.5                                                                                |
| Watts                          | 345                                                                                |
| Climate Class                  | 5                                                                                  |
| Operating Statement            | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard                  | EN 16825                                                                           |
| EEC                            | B                                                                                  |
| Energy Efficiency Index        | 26                                                                                 |
| Defrost Type                   | Auto                                                                               |
| Energy Consumption (kWh/24h)   | 2.66                                                                               |
| Energy Consumption (kWh/Annum) | 970                                                                                |



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
[+61 61 563 07 05](tel:+61615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



## TUC-93-HC

 Deep Undercounter Refrigerator, 3 Solid Swing Doors

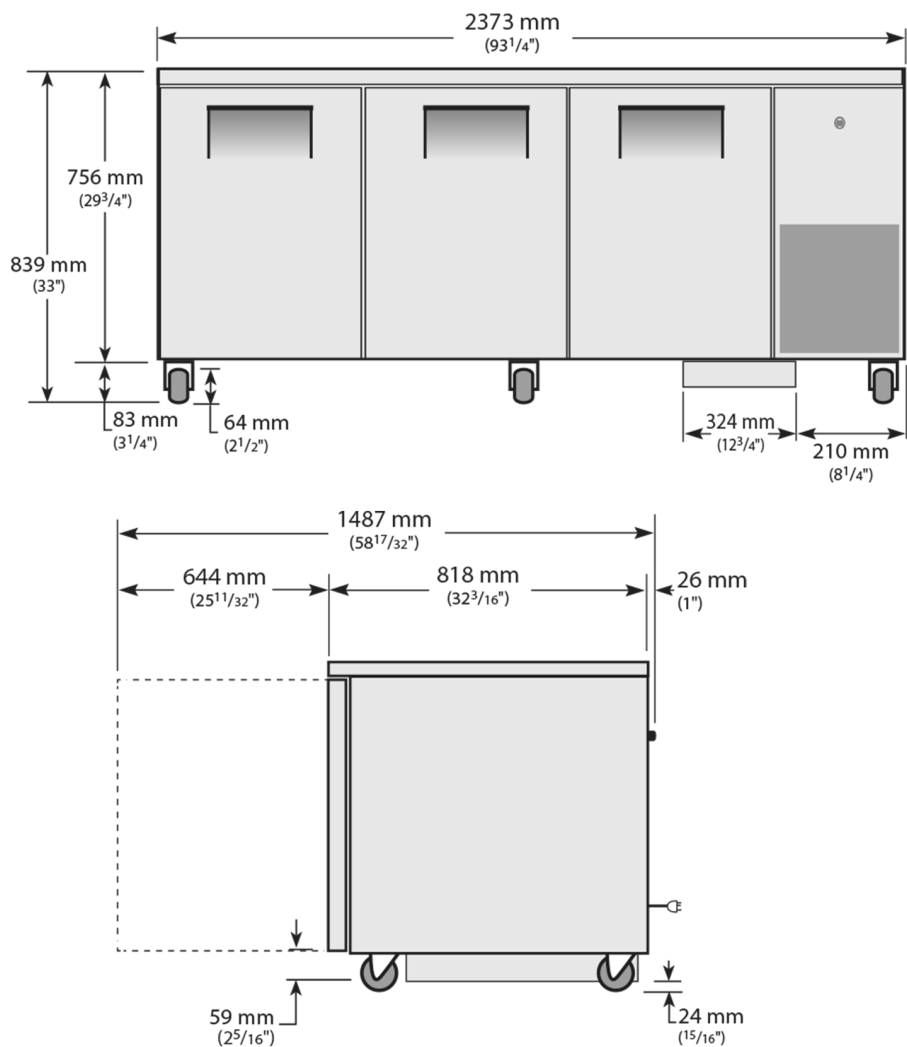

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

