

## Upright Cabinets

# T-15G-HC~FGD01

 Slimline Upright Foodservice Refrigerator, 1 Full Glass Swing Door



| Dimensions                         |                                                                              |
|------------------------------------|------------------------------------------------------------------------------|
| External Width (mm)                | 632                                                                          |
| External Depth (mm)                | 585                                                                          |
| External Height (mm)               | 1877                                                                         |
| Exclusions                         | Depth does not include 42 mm for door handle or 13 mm for rear access panel. |
| Net Volume (Litres)                | 290                                                                          |
| Gross Volume (Litres)              | 425                                                                          |
| Display Area (m <sup>2</sup> )     | 0.63                                                                         |
| Supplied Shelves                   | 5                                                                            |
| Shelf Size (L x D mm)              | 524 x 445                                                                    |
| Internal Net Height (mm)           | 1300                                                                         |
| Unpackaged Weight (kg)             | 105                                                                          |
| Packaged Weight (kg)               | 116                                                                          |
| Packaged Dimensions (W x D x H mm) | 737 x 699 x 1918                                                             |
| Supplied with                      | Heavy duty lock-in-place ø 51 mm castors (74 mm height)                      |

| Build                 |                                               |
|-----------------------|-----------------------------------------------|
| Door Description      | 1 Full Glass Swing Door                       |
| Door Opening          | Right (standard) or Left                      |
| Exterior Construction | Stainless steel front, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base  |
| Air Intake Position   | Front                                         |
| Ventilation Position  | Rear                                          |
| Clearance Required    | 26 mm rear, zero sides                        |
| Cord Length (Meters)  | 2.74                                          |
| Internal Lighting     | LED                                           |

| Technical                      |                                                                                                             |
|--------------------------------|-------------------------------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                                                 |
| Refrigerant                    | R290                                                                                                        |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1                                                                                          |
| Amps                           | 1.4                                                                                                         |
| Watts                          | 322                                                                                                         |
| Temperature Class              | M2                                                                                                          |
| Operating Statement            | Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising. |
| Test Standard                  | EN 23953                                                                                                    |
| EEC                            | A                                                                                                           |
| Energy Efficiency Index        | 8.1                                                                                                         |
| Defrost Type                   | Auto                                                                                                        |
| Energy Consumption (kWh/24h)   | 1.514                                                                                                       |
| Energy Consumption (kWh/Annum) | 553                                                                                                         |



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# T-15G-HC~FGD01

 Slimline Upright Foodservice Refrigerator, 1 Full Glass Swing Door

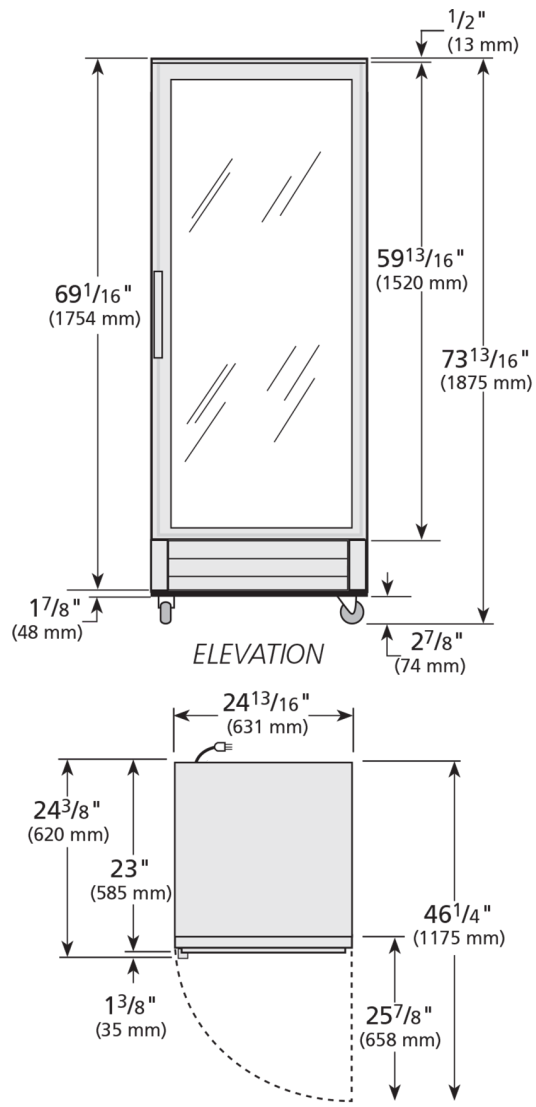

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com

