

Under-equipment Stands

TRCB-52-60-HC

 Under-Equipment Refrigerator, 2 Drawers, Extended top



Dimensions	
External Width (mm)	1524
External Depth (mm)	816
External Height (mm)	648
Exclusions	Depth does not include 26 mm for rear bumpers.
Net Volume (Litres)	78
Gross Volume (Litres)	280
Per Drawer Capacity (max depth mm)	3x 1/1 GN (100)
Unpackaged Weight (kg)	127
Packaged Weight (kg)	138
Packaged Dimensions (W x D x H mm)	1651 x 914 x 762
Supplied with	Heavy duty lock-in-place ø 102 mm castors (127 mm height)

Build	
Drawer Count	2
Exterior Construction	Stainless steel front and top, aluminium sides and rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Right side
Clearance Required	26 mm rear. Minimum clearance of 102 mm is required between bottom of cooking equipment heating element and the TRCB top.
Cord Length (Meters)	2.13
Max Weight Supported (kg)	326
Standard w/ Locks	Not Standard (build option)

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.1
Watts	253
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Test Standard	EN 16825
EEC	C
Energy Efficiency Index	47.2
Defrost Type	Auto
Energy Consumption (kWh/24h)	2.575
Energy Consumption (kWh/Annum)	940



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
[+61 61 563 07 05](tel:+61615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TRCB-52-60-HC

 Under-Equipment Refrigerator, 2 Drawers, Extended top

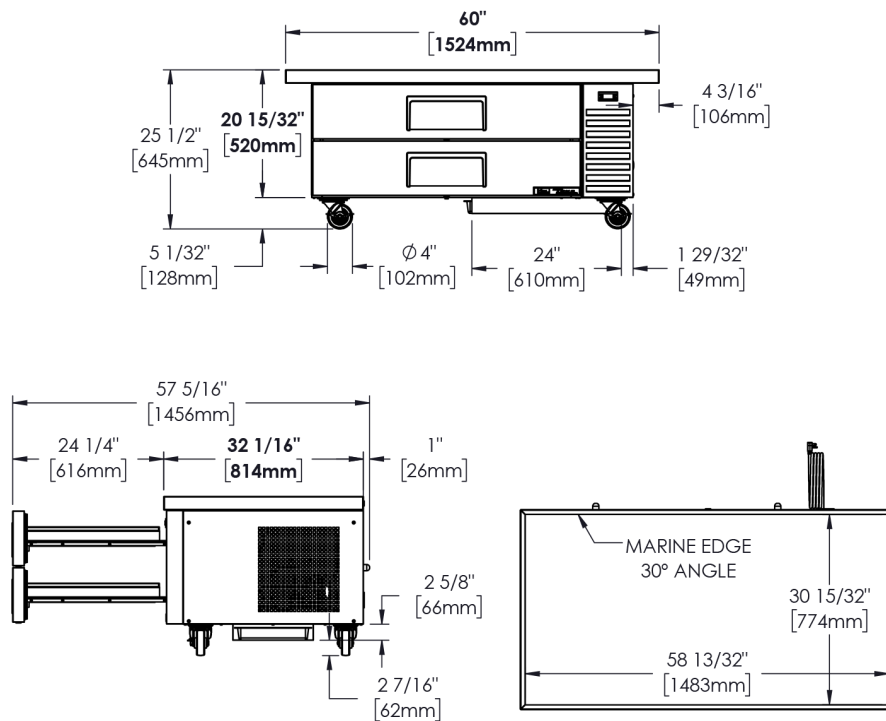

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

