

## Upright Cabinets

# T-19-HC

 Upright Foodservice Refrigerator, 1 Full Solid Swing Door



| Dimensions                         |                                                         |
|------------------------------------|---------------------------------------------------------|
| External Width (mm)                | 686                                                     |
| External Depth (mm)                | 623                                                     |
| External Height (mm)               | 1995                                                    |
| Exclusions                         | Depth does not include 13 mm for rear access panel.     |
| Net Volume (Litres)                | 347                                                     |
| Gross Volume (Litres)              | 538                                                     |
| Supplied Shelves                   | 4                                                       |
| Shelf Size (L x D mm)              | 582 x 464                                               |
| Internal Net Height (mm)           | 1300                                                    |
| Unpackaged Weight (kg)             | 101                                                     |
| Packaged Weight (kg)               | 112                                                     |
| Packaged Dimensions (W x D x H mm) | 788 x 788 x 2058                                        |
| Supplied with                      | Heavy duty lock-in-place ø 64 mm castors (83 mm height) |

| Build                 |                                               |
|-----------------------|-----------------------------------------------|
| Door Description      | 1 Solid Swing Door                            |
| Door Opening          | Right (standard) or Left                      |
| Exterior Construction | Stainless steel front, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base  |
| Air Intake Position   | Front                                         |
| Ventilation Position  | Rear                                          |
| Clearance Required    | 26 mm rear, zero sides                        |
| Cord Length (Meters)  | 2.74                                          |
| Internal Lighting     | LED                                           |
| Standard w/ Locks     | Standard                                      |

| Technical                      |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                        |
| Refrigerant                    | R290                                                                               |
| Voltage/Frequency/Phase        | 220-240V/50Hz/1                                                                    |
| Amps                           | 0.9                                                                                |
| Watts                          | 207                                                                                |
| Climate Class                  | 5                                                                                  |
| Operating Statement            | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard                  | EN22041:2019                                                                       |
| EEC                            | C                                                                                  |
| Energy Efficiency Index        | 39.1                                                                               |
| Defrost Type                   | Auto                                                                               |
| Energy Consumption (kWh/24h)   | 1.265                                                                              |
| Energy Consumption (kWh/Annum) | 462                                                                                |



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
[+61 61 563 07 05](tel:+61615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



## T-19-HC

 Upright Foodservice Refrigerator, 1 Full Solid Swing Door

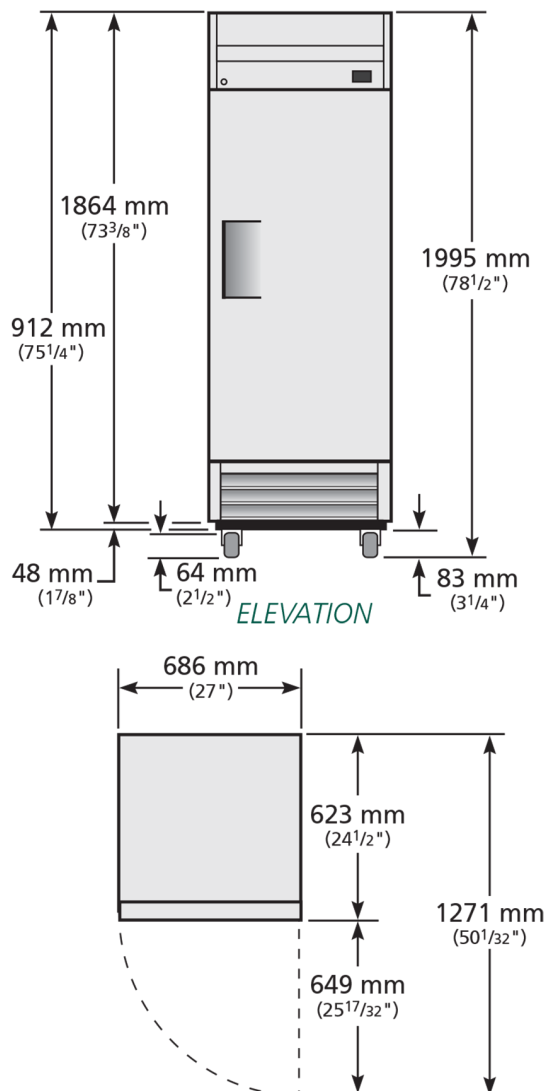

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

**true**  
REFRIGERATION