Prep Tables

TSSU-27-12M-C-HC FLID

Prep Table, 12x 1/6 Top Pans, 1 Solid Swing Door, Removable lids



Dimensions	
External Width (mm)	702
External Depth (mm)	867
External Height (mm)	961
Exclusions	Depth does not include 26 mm for rear bumpers. Height with lid closed.
Gross Volume (Litres)	184
Supplied Shelves	2
Shelf Size (L x D mm)	One 590 x 488 + One 590 x 349
Internal Net Height (mm)	535
Top Pans Supplied (depth mm)	12x 1/6 GN (100)
Unpackaged Weight (kg)	91
Packaged Weight (kg)	102
Packaged Dimensions (W x D x H mm)	769 x 940 x 1270
Cutting Board (L x D mm)	702 x 226
Supplied with	Heavy duty lock-in-place ø 127 mm castors (158 mm height)

Build	
Door Description	1 Solid Swing Door
Exterior Construction	Stainless steel front, top & lid, aluminium sides and rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	3.35
Standard w/ Locks	Not Standard (SPEC3 option)
Door Opening	Right-hinged (standard), field-reversible to the left.

Technical	
Temperature Range	0.5 : 5°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.6
Watts	368
Defrost Type	Auto

5 YEARS WARRANTY PARTS, COMPRESSOR & LABOUR

natural refrigerant.


Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland 0800 783 2049 TFIUK@truemfg.com
EMEA +41 61 563 07 05 TrueCHCustomerService@truemfg.com
Australia +61 2 9619 9999 TrueRefAus@truemfg.com


Prep Tables

TSSU-27-12M-C-HC FLID

Prep Table, 12x 1/6 Top Pans, 1 Solid Swing Door, Removable lids

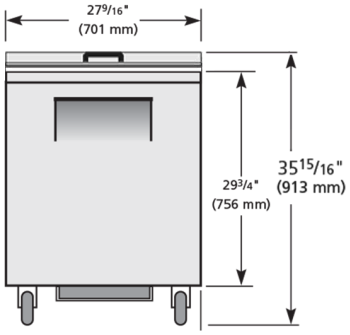

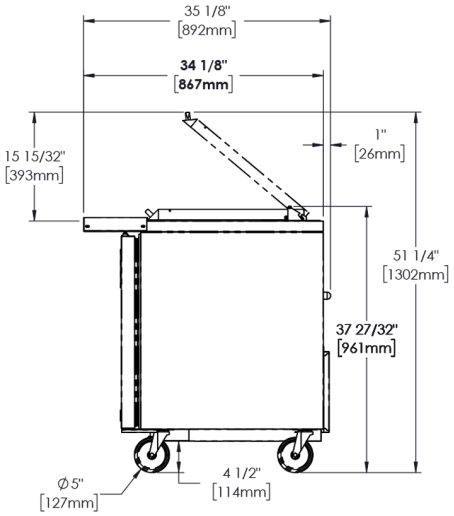



PAN LAYOUT

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland	0800 783 2049	TFIUK@truemfg.com
EMEA	+41 61 563 07 05	TrueCHCustomerService@truemfg.com
Australia	+61 2 9619 9999	TrueRefAus@truemfg.com