

Upright Cabinets

T-35F-HC

 Upright Foodservice Freezer, 2 Full Solid Swing Doors



Dimensions	
External Width (mm)	1004
External Depth (mm)	750
External Height (mm)	2074
Net Volume (Litres)	632.4
Gross Volume (Litres)	906
Supplied Shelves	8
Shelf Size (L x D mm)	439 x 569
Internal Net Height (mm)	1300
Unpackaged Weight (kg)	172
Packaged Weight (kg)	184
Packaged Dimensions (W x D x H mm)	1156 x 902 x 2134
Exclusions	Depth does not include 13 mm for rear access panel.
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height)

Build	
Cord Length (Meters)	2.74
Internal Lighting	LED
Door Description	2-Stainless Steel Solid Doors with Clear Aluminum Liner
Door Opening	Right (standard) or Left
Exterior Construction	Stainless Steel Front with Aluminum Ends and GalFan Back and Top
Interior Construction	Clear Coated Aluminum Liner, Stainless Steel Floor with Coved Corners
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Standard w/ Locks	Standard

Technical	
Temperature Range	-23.3
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50Hz/1
Amps	3.1
Watts	-
Defrost Type	Auto
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Test Standard	EN ISO 22041:2019
EEC	D
Energy Efficiency Index	56.9
Energy Consumption (kWh/24h)	7.152
Energy Consumption (kWh/Annum)	2610
Temperature Class	L1



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



T-35F-HC

 Upright Foodservice Freezer, 2 Full Solid Swing Doors

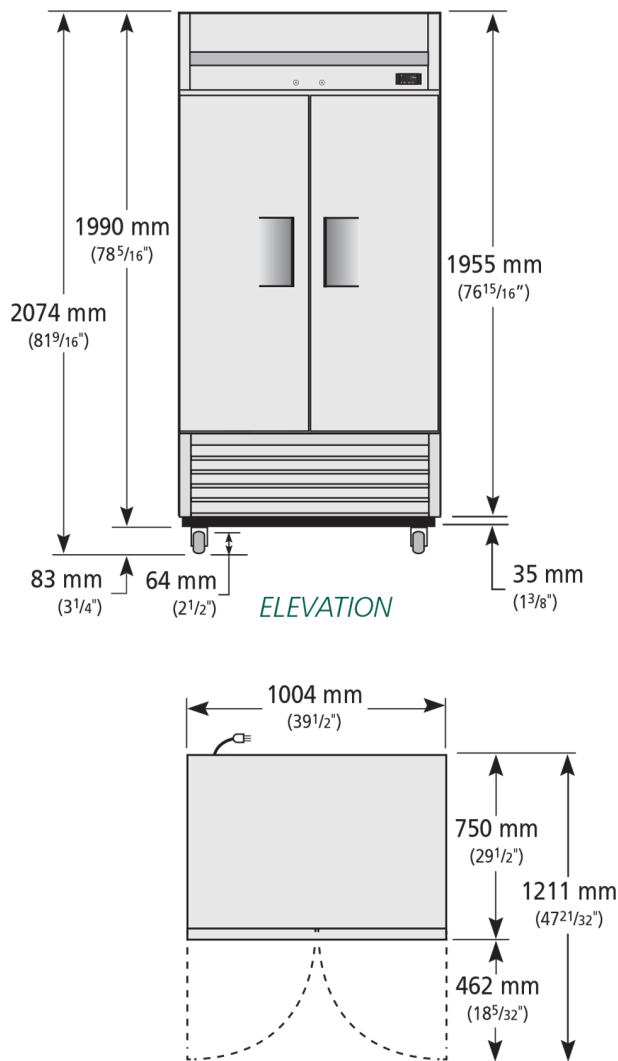

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

true
REFRIGERATION